

## DATASHEET

# HYFIRE TAURUS EXPANDER MODULE TAU-EXM-01

TAURUS   
By Hyfire

The Hyfire Taurus Expander Module is compatible with all Taurus wireless intelligent translators and the conventional expander. The unit provides a convenient method to increase radio communication range beyond that possible from a single translator by relaying the radio communication to further expanders or directly to the wireless field devices, allowing to build large fully wireless systems or add wireless devices onto areas where cabling for translators is difficult or impossible. The expanders are programmable for a redundant path to the translator, so that if any expander in the chain fails, the transmission path can find an alternate route. The redundant paths are identified and tested during system commissioning for maximum reliability. All the wireless communication relies on a channel pair for spurious RF noise rejections and maximum link reliability. All expanders are fully monitored ensuring that the highest levels of life safety are maintained.




## KEY FEATURES

- Compatible with all intelligent and conventional translators
- Bi-directional wireless communication
- 8 pairs of network channels
- Dual channel and dual path redundancy
- Long communication range ( $\approx 1$  km in open air)
- Internal antennae design protects from environmental conditions, vandalism, accidental damage or misuse
- Requires external power supply unit
- Low current consumption
- Rich fire data transfer to translator (eg optical and thermal value, link quality, battery status, chamber drift compensation status)
- Up to 32 wireless field devices per expander
- Easy scan & link programming option
- External PSU status supervision
- 3rd party Approval to EN54-18 and EN54-25
- 5 year product warranty

## TECHNICAL SPECIFICATION

Loop power supply range	868 – 870 MHz
Operating frequency range	9Vdc – 30Vdc
Max radiated power	24mA (@12Vdc)
IP rating	14dBm (25mW)
Operating Temperature	65
Max humidity (non condensing)	-10°C to +55°C
Typical current consumption	90% RH
Weight	700 g
Dimensions	235 x 160 x 70 mm

## TECHNICAL INFORMATION

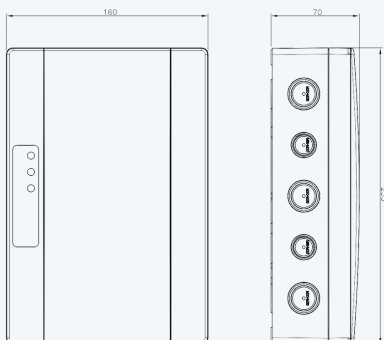

## STANDARDS & APPROVALS

- BS EN54-18: Input/Output Devices
- BS EN54-25: Components using radio links and system requirements

