

DATASHEET

HYFIRE TAURUS CONNECT DONGLE

TAU-DD-01



The dongle device allows the user to wirelessly connect the PC to the translator for system management purposes (commissioning, debugging and diagnostic).

The device is compact and easily portable, it fits the pocket. The device is powered by usb cable once connected to the pc or by the two onboard batteries.




MAIN FEATURES

- Bi-directional wireless communication to Taurus infrastructure
- Can be used with Taurus addressable and conventional translators
- Communication range up to 200 m in open air
- Utilises standard low-cost alkaline AA battery technology
- 5 years product warranty

TECHNICAL SPECIFICATIONS

Operating frequency range	868 – 870 MHz
Max radiated power	14dBm (25mW)
Weight (without batteries)	100 g
Batteries	2x AA (1.5 V)
Dimensions	79 mm x 117 mm x 24 mm
Operating Temperature	-10°C to +55°C
Max humidity (non condensing)	95% RH

TECHNICAL INFORMATION

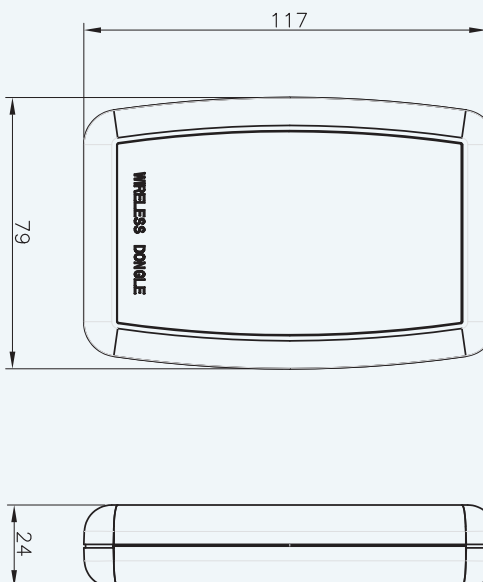

STANDARDS AND APPROVALS



Hyfire Wireless Fire Solutions

Unit B12a
Holly Farm Business Park Honiley,
Warwickshire CV81NP

T: +44 (0) 1926 485282
E: info@hyfirewireless.co.uk
www.hyfirewireless.com


A Halma company