

# DATASHEET

## HYFIRE TAURUS

### REMOTE INDICATOR

TAU-RI-01

**TAURUS**   
By Hyfire

The Wireless Taurus Remote Indicator is a programmable output device which can be operated by the control panel in the event of fire, alarm or fault conditions from selected devices.

The activation command is sent from the control panel to the indicator through the wireless translator module. Bi-directional communications with the wireless translator is based on a proven protocol and wireless technology and is fast, reliable and provides the highest level of security.




#### KEY FEATURES

- Bi-directional wireless communication
- Can be used with Taurus addressable and conventional translators
- 22 pairs of field channels
- Dual channel redundancy
- Long communication range ( $\approx 1$  km in open air)
- 5 year battery life
- Utilises standard low cost lithium battery technology
- Rapid, cost effective installation with minimal disturbance
- Easy scan & link programming option
- 5 year product warranty

#### TECHNICAL SPECIFICATION

|                               |                       |
|-------------------------------|-----------------------|
| Operating frequency range     | 868 – 870 MHz         |
| Max radiated power            | 14dBm (25mW)          |
| Batteries                     | CR123A (3 V & 1.2 Ah) |
| Batteries lifespan            | 5 years               |
| Max humidity (non condensing) | 95% RH                |
| Operating Temperature         | -10°C to +55°C        |
| Weight (without batteries)    | 60 g                  |
| Dimensions                    | 80 x 80 x 32 mm       |

#### TECHNICAL INFORMATION

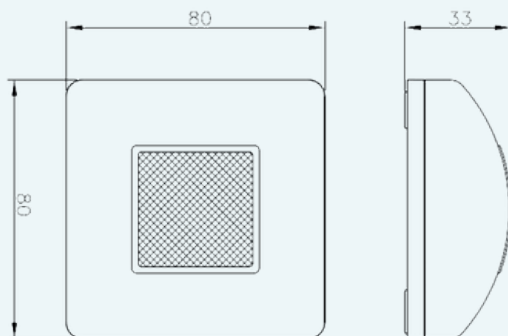

Johannesburg - Cussonia Park,  
3 Ridge Road, Laser Park,  
Johannesburg, 2170

T: +27 (0)11 794 9144  
E: [hyfire@technoswitch.co.za](mailto:hyfire@technoswitch.co.za)  
[www.hyfirewireless.com/za](http://www.hyfirewireless.com/za)

**Hyfire**   
In Partnership with  
**TECHNOSWITCH** 